



## AC90-270V Fire Alarm Control Panel 4 Zone 8 Zone 16 Zone With Conventional Smoke Alarm

### Our Product Introduction

for more products please visit us on [xhafiresafety.com](http://xhafiresafety.com)


#### Basic Information

- Place of Origin: China
- Brand Name: XHA
- Certification: CE
- Minimum Order Quantity: 1
- Price: negotiable
- Packaging Details: 8PCS/carton
- Delivery Time: 3-7working days
- Payment Terms: T/T, Western union
- Supply Ability: 100000pcs/month




#### Product Specification

- Power Supply: DC24V
- Applications: Conventional Alarm System
- Operating Temperature: -10°C To 50°C
- Compatibility: Compatible With Conventional Detectors
- Installation: Wall/Ceiling Mount
- Number Of Zones: 4/8/16 Zone
- Warranty: 1 Year
- Name: Conventional Fire Alarm Control Panel
- Highlight: 270V Fire Alarm Control Panel 4 Zone,  
Fire Alarm Control Panel 8 Zone,  
Conventional Fire Alarm Control Panel 8 Zone

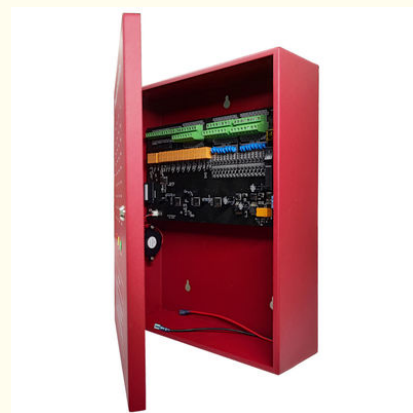

## Product Description

### AC90-270V Fire Alarm Control Panel with Conventional Smoke Alarm

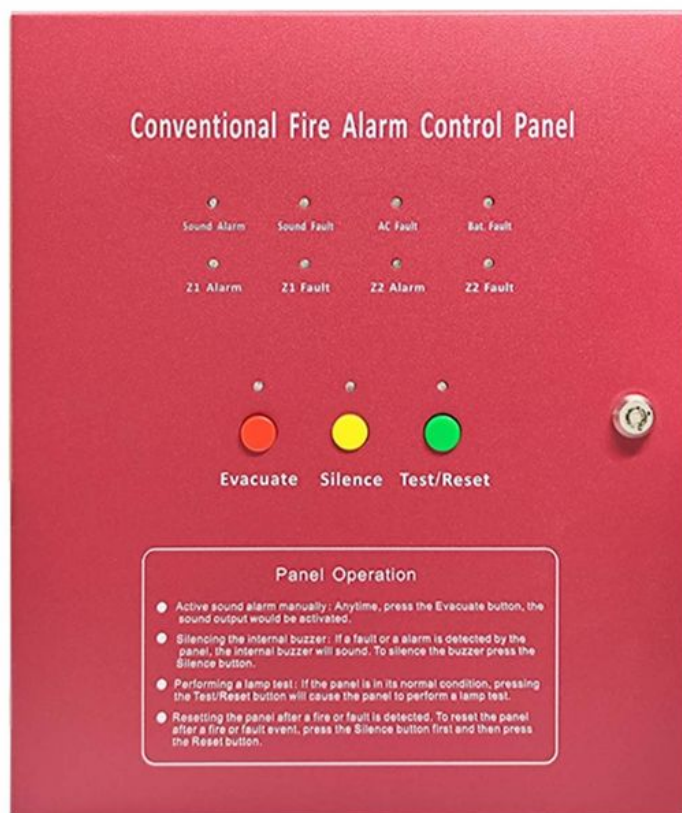

#### Product Description:

The detection method used in this conventional fire alarm system is either smoke or heat detection. Smoke detection is ideal for detecting smoldering fires, while heat detection is more suitable for detecting fires with high heat levels. The choice of detection method depends on the specific requirements of the building. Our conventional fire alarm system is a reliable and cost-effective solution for fire detection. It is designed to cater to buildings that require a common fire alarm system. The system is easy to install, operate, and maintain. It is a type of fire alarm system that has been in use for many years and is widely recognized and accepted in the industry.

In summary, our conventional fire alarm system is a reliable, cost-effective, and easy-to-use solution for fire detection in buildings. It is available in different zones, uses smoke or heat detection methods, is a type of common fire alarm system.

#### Technical Parameters:

Type:	Conventional Fire alaarm panel
Operating Humidity:	10% To 95%
Weight:	2.5kg
Alarm Output:	Sound/Light
Warranty:	1 Year
Installation:	Wall/Ceiling Mount
Number Of Zones:	4/8/16/32 zone
Power Supply:	AC90-270V
Operating Temperature:	-10°C To 50°C

Certifications:

CE

This table shows the technical parameters of the Conventional Fire Alarm System, also known as Classic Fire Alarm System, Traditional Fire Alarm System, or Standard Fire Alarm System



### Product Category

Conventional Fire Alarm System  
Addressable fire alarm system  
Gas Extinguishing control system  
Beam Detector  
4 wire smoke detectors with relay output.  
2 wire Conventional smoke and heat detectors  
Explosion-proof flame detector for fire alarm system  
Standalone smoke detectors and combustible gas detector



**Shenzhen Xinhe'an Technology Co., Ltd.**



+8615986702194



Claire.tian@xinheantech.com



xhafiresafety.com

406,Jude Building,Zhengfeng South Road,Fuyong Street,Bao'An District, Shenzhen City, Guangdong Province.  
China,518103