Ceiling Mounting Addressable Smoke Detector For Fire Fighting And Fire **Security Alarm System**

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1PCS
- Price:
- · Packaging Details:
- Delivery Time:
- 3 Working days • Payment Terms: T/T, Western Union

China

XHA

CE

CA9001

negotiable

100pcs/carton

100000PCS/Month

• Supply Ability:



Product Specification

- Applications:
- Wired:
- Installation:
- Connected:
- Working Voltage:
- Operating Temperature:
- Highlight:

Addressable	Alarm	System

2-Wired, Non-polarized **Ceiling Mounting**

Loop Bus

DC24V

- -10°C To 50°C
- Ceiling mounting Addressable Smoke Detector, Fire Fighting Addressable Smoke Detector



Our Product Introduction



Introduction

Addressable smoke alarms are commonly found in commercial, industrial, and institutional buildings where advanced fire detection and emergency response capabilities are required.

The key advantages of using addressable smoke alarms in a fire alarm system include:

Precise Alarm Location: The unique address of each smoke alarm enables the control panel to identify the exact location of an activated alarm.

Enhanced Reliability: Addressable smoke alarms offer self-diagnostics and remote monitoring capabilities, improving the overall system reliability.


Customizable Settings: Adjustable sensitivity settings help optimize the alarms' performance based on the specific environment.

Integrated System Functionality: The integration with the addressable fire alarm control panel enables coordinated emergency responses and comprehensive system management.

Parameters

Product name	Smoke Alarm Detector
Loop Bus wired	2-wire Non-polarized
Alarm Currrent	≤2mA
Work voltage	DC17V DC33V
Weight	Weight:93g(with base)

Type Monitor Current Dimension Operating Environment Certification Addressable ≤300uA Φ85*52 mm Temperature -10°C~+50°C Humidity ≤95%. CE

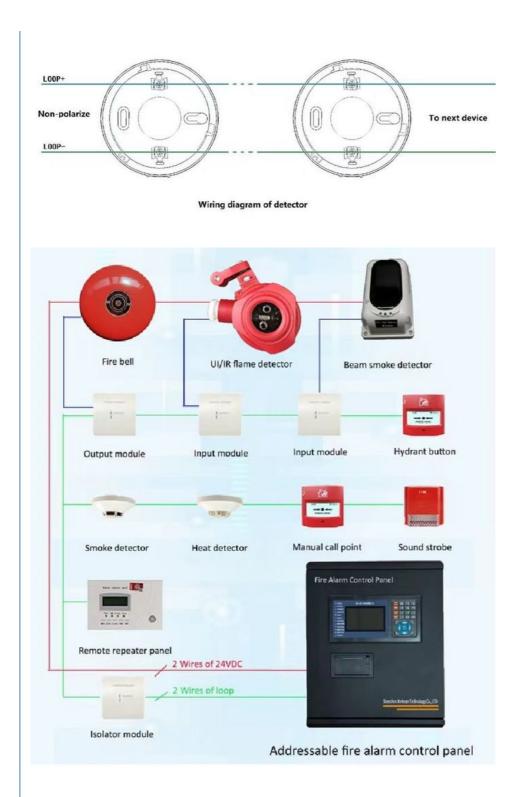

Product range

Conventional Fire Alarm System Addressable fire alarm system Gas Extinguishing control system Beam Detector 4 wire smoke detectors with relay output. 2 wire Conventional smoke and heat detectors Explosion-proof flame detector for fire alarm system Standalone smoke detectors and combustable gas detector

Service

- 1. OEM &ODM service.
- 2. Provide technical support and after-sale service.
- 3. 1 year warranty.
- 4. Normally 15 working days lead time.
- 5. Welcome sample order.

