# Non Polarity 2 Wired Conventional Smoke Detectors for Gas Extinguishing Systems and Fire Fighting Equipment

# **Basic Information**

Place of Origin:

хна

- Brand Name: XHA
- Certification:
- Model Number:
- Minimum Order Quantity: 1PCS
- Price: negotiable
- Packaging Details:
- Delivery Time:
- Payment Terms: T/T, Western Union

China

CE

XHA8015

30pcs/carton

3 Working days

10000PCS/Month

Supply Ability:



# **Product Specification**

<ul> <li>Product Type:</li> </ul>	Automatic Fire Suppression System
<ul> <li>Working Voltage:</li> </ul>	DC9-28V
Detection System:	Smoke Detectors
<ul> <li>Applications:</li> </ul>	Fire Alarm System
Monitor Current:	≤800uA
Alarm Current:	≤20mA
Operating Humidity Range:	10% To 95% Relative Humidity(Non- condensing)
• Type:	Conventional Smoke Alarm With Remote LED Control Function
• Highlight:	conventional gas extinguishing system, conventional gas station extinguishing system,

non polarity gas extinguishing system



# for more products please visit us on xhafiresafety.com

Our Product Introduction

# More Images



### Conventional Smoke Detector For Fire Fighting Gas Extinghuishant Control System




### Introduction

Conventional smoke detectors are a fundamental component of fire alarm systems, serving as the primary means of detecting the presence of smoke and initiating an alarm. These devices play a vital role in early fire detection, allowing building occupants to be alerted and evacuate the premises in a timely manner. it can be used for any brand conventional fire alarm controllers and FM200 gas extinghushant control system.

### Parameters

Product Type	Smoke Detector with Remote Function
Voltage range	9vdc to 27vdc (Nonpolarity)
Alarm Current	≤20ma
Monitor Current	≤800uA
Wired	2 Wired No-polarized.
Operating Temp	-10 to +55
Operating Humidity Range	10% to 95% Relative Humidity(Non-condensing)

### Application in Addressable Fire Alarm System

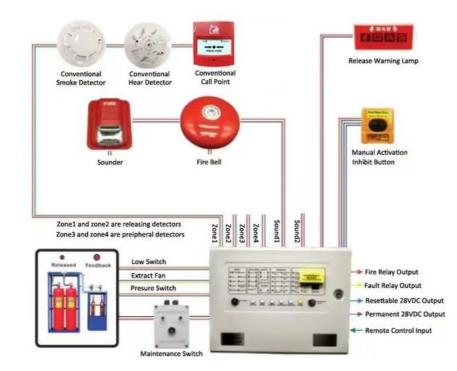

### **Product Range**

Conventional Fire Alarm System Addressable fire alarm system Gas Extinguishing control system Beam Detector 4 wire smoke detectors with relay output. 2 wire Conventional smoke and heat detectors Explosion-proof flame detector for fire alarm system Standalone smoke detectors and combustable gas detector

### Service

- 1. OEM &ODM service.
- 2. Provide technical support and after-sale service.
- 3.1 year warranty.
- 4. Normally 15 working days lead time.
- 5. Welcome sample order.

