



AC90-270V Fire Alarm Control Panel The Perfect Choice for Conventional Fire Alarm System

Our Product Introduction

for more products please visit us on xhafiresafety.com

Basic Information

- Place of Origin: China
- Brand Name: XHA
- Certification: CE
- Minimum Order Quantity: 1
- Price: negotiable
- Packaging Details: 8PCS/carton
- Delivery Time: 3-7working days
- Payment Terms: T/T, Western union
- Supply Ability: 100000pcs/month



Product Specification

- Color: Red
- Number Of Zones: 4/8/16 Zone
- Warranty: 1 Year
- Transport Package: Carton
- Applications: Conventional Alarm System
- Name: Conventional Fire Alarm Control Panel
- Sampling Zone: 4 Zones
- Installation: Wall/Ceiling Mount
- Alarm Output: Sound And Light
- Connected: Independent
- Compatibility: Compatible With Conventional Detectors
- Highlight: **Conventional Fire Alarm Control Panel, AC90-270V Fire Alarm System,**



More Images



Product Description

AC90-270V Fire Alarm Control Panel with Conventional Smoke Alarm



Product Description:

The detection method used in this conventional fire alarm system is either smoke or heat detection. Smoke detection is ideal for detecting smoldering fires, while heat detection is more suitable for detecting fires with high heat levels. The choice of detection method depends on the specific requirements of the building. Our conventional fire alarm system is a reliable and cost-effective solution for fire detection. It is designed to cater to buildings that require a common fire alarm system. The system is easy to install, operate, and maintain. It is a type of fire alarm system that has been in use for many years and is widely recognized and accepted in the industry.


In summary, our conventional fire alarm system is a reliable, cost-effective, and easy-to-use solution for fire detection in buildings. It is available in different zones, uses smoke or heat detection methods, is a type of common fire alarm system.

Technical Parameters:

Type:	Conventional Fire alarm panel
Operating Humidity:	10% To 95%
Weight:	2.5kg
Alarm Output:	Sound/Light
Warranty:	1 Year
Installation:	Wall/Ceiling Mount
Number Of Zones:	4/8/16/32 zone
Power Supply:	AC90-270V

Operating Temperature:	-10°C To 50°C
Certifications:	CE

This table shows the technical parameters of the Conventional Fire Alarm System, also known as Classic Fire Alarm System, Traditional Fire Alarm System, or Standard Fire Alarm System

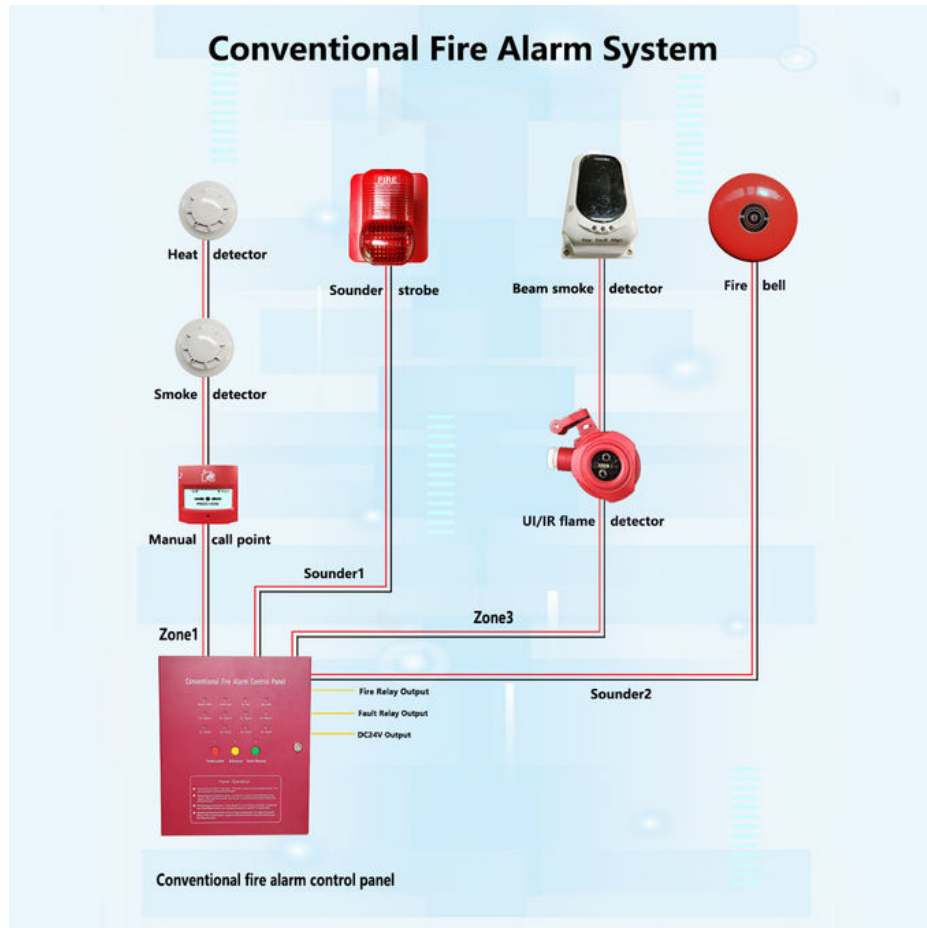

Product Category

Conventional Fire Alarm System
 Addressable fire alarm system
 Gas Extinguishing control system
 Beam Detector
 4 wire smoke detectors with relay output.
 2 wire Conventional smoke and heat detectors
 Explosion-proof flame detector for fire alarm system
 Standalone smoke detectors and combustible gas detector



Shenzhen Xinhe'an Technology Co., Ltd.



+8615986702194



Claire.tian@xinheantech.com



xhafiresafety.com

406,Jude Building,Zhengfeng South Road,Fuyong Street,Bao'An District, Shenzhen City, Guangdong Province.
 China,518103